



Mufloor Antistatic HPL

High Pressure Laminate with a very tough surface, particularly suitable for raised access flooring systems.

Mufloor Antistatic HPL Technical Information		
Product grades A4 + 400 revs A10 + 1000 revs A30 + 3000 revs	Abrasion resistance EN438/2.6	400 revs. 1000 revs. 3000 revs.
	Dry heat resistance EN438/2.8	OK
	Impact resistance - small diameter sphere EN438/2.11	20 N
Color pattern 2010 2010-6 2103 2158 2069 2208	Stain resistance EN438/2.15	OK degree no important alteration
	Resistance to cigarettes EN438/2.18	OK no important alteration
	Electrical resistance NFPA 99	antistatic $1 \times 10^8 - 1 \times 10^{11}$ Ohms dissipating $1 \times 10^6 - 1 \times 10^7$ Ohms
	Resistance to immersion in hot water EN438/2.7	6 %
	Dimensional stability at high temperatures EN438/2.9	0.5 L 1.0 T %
	Scratch resistance EN438/2.14	2.5 N
Thickness available 1.0 mm 1.2 mm 1.5 mm	Colour fastness under light EN438/2.16	6 degree
	Resistance to steam EN438/2.24	OK no important alteration
	Density DIN 53 479	1400 Kg/m ³
	Electrical resistance Antistatic: $1 \times 10^8 - 1 \times 10^{11}$ Dissipating: $1 \times 10^6 - 1 \times 10^7$	

Top Photo

Raised access flooring:
Raised access floors with HPL finish.
A4 2010 1.2mm Antistatic HPL

Bottom photo

Raised access flooring:
Raised access floor panels.
A4 2010 1.2mm Antistatic HPL



Order information:

Order format example: HPL A4, 2010, 1.2mm, Antistatic.

HPL dimension: 610 x 610 mm.

Order quantity: with a minimum quantity order requirement.


Mufloor Antistatic HPL



2010




2010-6

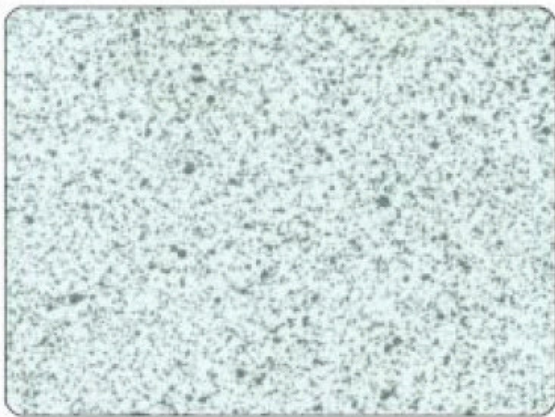

2103



2158

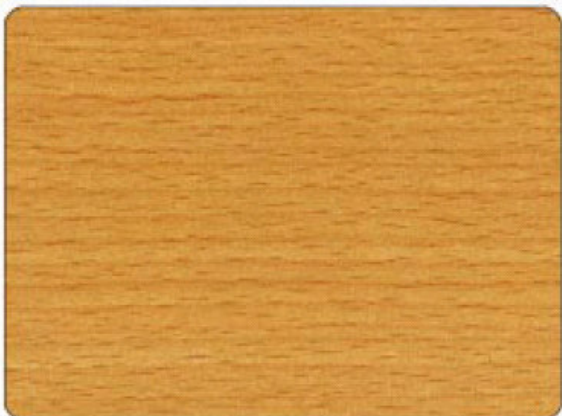

2208



2069